

ICV-2333ORSPVT

2MP Starlight Motorized Vandalproof IR Dome Camera




Features

- Up To 1920x1080@30fps
- S+265 compression
- Motorized 2.8 - 12mm
- Min. illumination Color: 0.001Lux@F1.4
- Smart IR, IR Range: 30m
- Support Video Analytics
- Support Human/Vehicle Classification
- Interface Audio I/O:1/1, Alarm I/O:2/1, Built-in Mic,
- Micro SD card slot up to 256GB, Reset Button,
- POE, IP66, IK10
- Operating Conditions -35°C~65°C, 0~95% RHG
- CE

Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.001Lux@ (F1.4 ACG ON) B/W: 0Lux with IR
Shutter Time	1s to 1/100,000s
Lens	Motorized 2.8 - 12mm F1.4~F2.8
Lens Mount	ø14
Day & Night	Dual IR Cut Filter with Auto Switch
Wide Dynamic Range	120 dB
Digital Noise Reduction	3D DNR
Angle Adjustment	Pan 0~330°, tilt 0~75°, rotate 0~350°
FOV	Horizontal field of view: 83°~33.7°
Compression Standard	
Video Compression	S+265/H.265/H.264H/M-JPEG
Video Bit Rate	32Kbps ~ 6Mbps
Audio Compression	G.711/G.711U/ADPCM
Audio Bit Rate	8K ~ 48Kbps
Image	
Max. Image Resolution	1920x1080
Main Stream	PAL: 25fps (1920x1080, 1280x960, 1280x720, 704x576, 640x480) NTSC: 30fps (1920x1080, 1280x960, 1280x720, 704x480, 640x480)
Sub Stream	PAL: 25fps (704x576, 704x288, 640x360, 352x288) NTSC: 30fps (704x480, 704x240, 640x360, 352x240)
Image Settings	Saturation, brightness, contrast, sharpness, adjustable by client software or web browse
HLC	Y
ROI	N/A
Privacy Mask	Y
Picture Overlay	Y
OSD	16x16, 32x32, 48x48, adaptable size, Letters Such as Week, Date, Time, Total 1 Regions
Network	
Network Storage	FTP
NTP	Y
ANR	Y
Video Analytics	Tripwire, Double Tripwire, Perimeter, Object Lost, Loitering, Running, Parking, Video Abnormal, Audio Abnormal
Alarm Trigger	Event Input, Event Output, Motion Detection, Mask Alarm, IP Address Conflict, MAC Address Conflict
Protocols	TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, MULTICAST, UPnP, FTP, IPv4, NTP, RTSP, SMTP, IGMP, 802.1x, QoS, Multicast
Remote Connection	≤7
System Compatibility	ONVIF (PROFILE S/T), SDK, CGI, P2P
Interface	
Audio Input	1-ch
Audio Output	1-ch
Communication Interface	1-ch RJ45 10M / 100M Ethernet Interface
Alarm Input	2-ch
Alarm Output	1-ch
On-board Storage	MicroSD Card Slot, up to 256GB
Extension	Reset
General	
Language	15 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebrew, Farsi, Arabic
Operating Conditions	-35°C ~ 65°C, 0 ~ 95% RH
Power Supply	DC 12 V ± 20%, POE
Power Consumption	Max: 7.5W(12V) MAX:9W(POE)
IR Light	18pcs
IR Distance	30m
Impact Protection	IP66, IK10
Dimensions	Φ143x124mm (Φ5.63"×4.88inch)
Weight	0.95Kg

Dimensions

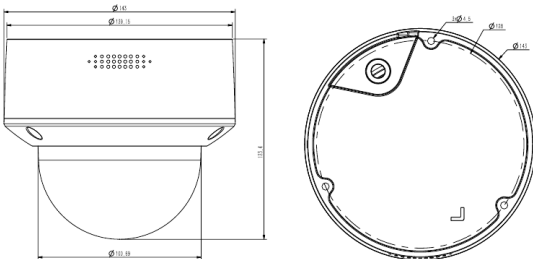

Intellivix Co., Ltd

(6F Prince Hyoryung Building)4, Hyoryung-ro 34-gil, Seocho-gu, Seoul 06704, Korea
Tel : +82-2-581-3883 Email : overseas@intellivix.com